

Roverframe™

 made in Italy

Subframe for installing windows

The system for

- ✓ a clean and fast installation of the window
- ✓ a perfect finish
- ✓ a strong and secure fixing to the wall

February 24, 2015 Edition




**ROVER
PLASTIK**

IDEE CONCRETE, SOLUZIONI FLESSIBILI

Roverframe is Roverplastik's subframe for the installation of the window designed to be fit directly to the rough opening all works to be completed BEFORE the window is installed: it provides the corner beads for the plastering thus avoiding the typical damage to the window frames due to the fact that they are usually installed in a stage before the plastering is completed.

Aluminium profile AL932GEX

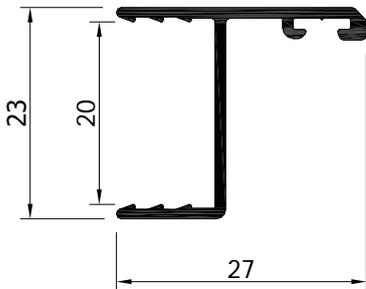

Extruded aluminium profile specially designed for the Roverframe System, to harbour the 20 mm wooden subframe in Gaboon and for the ideal finish of the plaster. To be used in addition with AL851GEX in case of corner joint.


CODE	DESCRIPTION	QUANTITY		PRICE (€/m)
AL932GEX	Aluminium profile	5 meter Bars	10 Bar Package	3,00

Minimum order: 1 package

CODE	DESCRIPTION	QUANTITY	PRICE - PACKAGE (€)
AL851GEX	Corner joint element	200 Pieces Package	42,80

Minimum order: 1 package

External corner bead for plaster

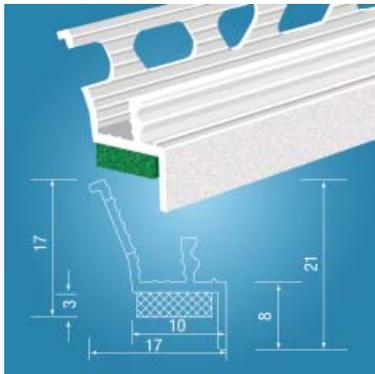

External corner bead for plaster in extruded rigid PVC bars with an expanded polyurethane mat for a permanently elastic joint with the plaster to avoid cracking due to drying or eventual adjustments due to thermal or mechanical stress.

The profile is self - adhesive and the mat is specially treated to be waterproof and at the same time permeable to vapor thus allowing eventual moisture to dry without causing damage.

CODE	DESCRIPTION	QUANTITY		PRICE (€/m)
TTPEEX	Plastering corner beads	2,5 meter Bars	30 Bar Package	3,90

Minimum order: 1 package

Roverframe™ shoulder element



Roverframe shoulder element: 20 mm thick boards in Gaboon wood with a depth of 40 mm by a length of 3100 mm, ideal to manufacture Roverframe system for windows with a 68 mm frame. The boards have one side treated with a special resin to reduce moisture absorption during plastering.

Minimum order: 10 Bars. The boards can be ordered and are delivered in multiples of 10.

CODE	DESCRIPTION	QUANTITY	PRICE (€/m)
RVRCOM4030EX	20 mm thick boards in Gaboon wood	10 Bars Package (31 meters)	3,80

Minimum order: 1 package

Joint Sealing tape TTGAEX



Joint sealing tape of polyurethane soft foam with acrylate dispersion impregnation, accessory agents and filling agents. TTGAEX can be put to universal use for the sealing of joints in structural engineering. TTGAEX is especially used in interior work for the sealing of connection joints due to its good sound insulation values. Available in width of 15 mm.

CODE	DESCRIPTION	QUANTITY		PRICE (€/m)
TTGAEX	Frontal expanding joint sealing tape	7,5 meter Rolls	20 Roll Package (150 meter)	1,50

Minimum order: 1 package

Joint Sealing tape TTGA3EX



TTGA3EX is a precompressed and impregnated multifunction joint-sealing tape for the sealing of the inner function area and for thermal and sound insulation in the window joint seal with a single product. The tape meets all of the requirements of an airtight, thermal insulating and sound insulating sealing. Available in width of 56 mm.

CODE	DESCRIPTION	QUANTITY		PRICE (€/m)
TTGA3EX	Lower expanding joint sealing tape	9,4 meter Rolls	5 Roll Package (47 meter)	5,40


Minimum order: 1 package

Spacing assembly screw



Galvanised steel spacing assembly screws with an outer thread diameter of 7,5 mm, ideal for stress free fixing of frames in multitude of different materials as concrete, hollow and solid brick, wood, steel, aluminium and so on.

According to the substrate the drill hole diameter the goes from 6,5 mm to 5,5 mm from the most to the least dense and the minimum depth from 30 mm to 60 mm as reported in the figure.

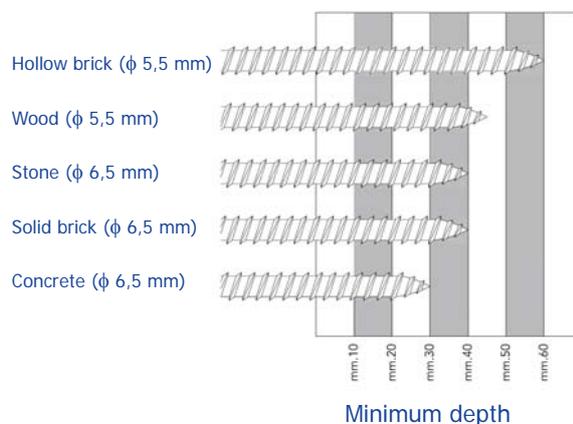

CODE	DESCRIPTION	QUANTITY	PRICE (€/piece)
8BLAPTT092EX	92 mm length spacing assembly screw	200 pieces Package	0,42

Minimum order: 1 package

Hybrid polymers sealant and adhesive MS ENERGY



High-quality, extremely versatile sealant and adhesive on the basis of hybrid-polymers. Good adhesion on concrete, masonry, plaster, wood, bricks, metals, plastics and glass. Suitable for interior and exterior connection- and movement joints and for sealings at building- and interior constructions.

CODE	DESCRIPTION	QUANTITY	PRICE - PACKAGE (€)	PRICE - PIECE (€)
RVRMSB290P20EX	White sealant MS ENERGY ml 290	20 Pieces Package	202,00	10,10

Minimum order: 1 package

High Elasticity foam ENERGY FLEX




Special foam with high elasticity Especially suitable for joints with a high degree of movement, for example structural expansion joints, window connection joints of big window elements etc. Tested sound insulation (joint sound absorption = 60 dB tested by ift-Rosenheim) and fast curing.

CODE	DESCRIPTION	QUANTITY	PRICE - PACKAGE (€)	PRICE - PIECE (€)
8BLAPSEX	High Elasticity foam ENERGY FLEX	12 Pieces Package	166,80	13,90



Minimum order: 1 package

Roverframe™ INSTALLATION INSTRUCTIONS

- 1) Position **Roverframe™** plumb and square and temporarily set the position with the use of wedges;
- 2) mechanically fix the **Roverframe™** to the wall by the use of spacing assembly screws (cod. 8BLAPTTTC092EX);
- 3) seal between brick and frame using the permanently elastic, thermally and acoustically performing ENERGY FLEX PU foam (cod. 8BLAPSEX);
- 4) apply the self adhesive transpirable corner bead for the plaster on the outer side of the frame (cod. TTPEEX), which avoids the forming of cracks after plastering and gives a permanently elastic joint between the frame and the plaster;
- 5) apply the plaster.

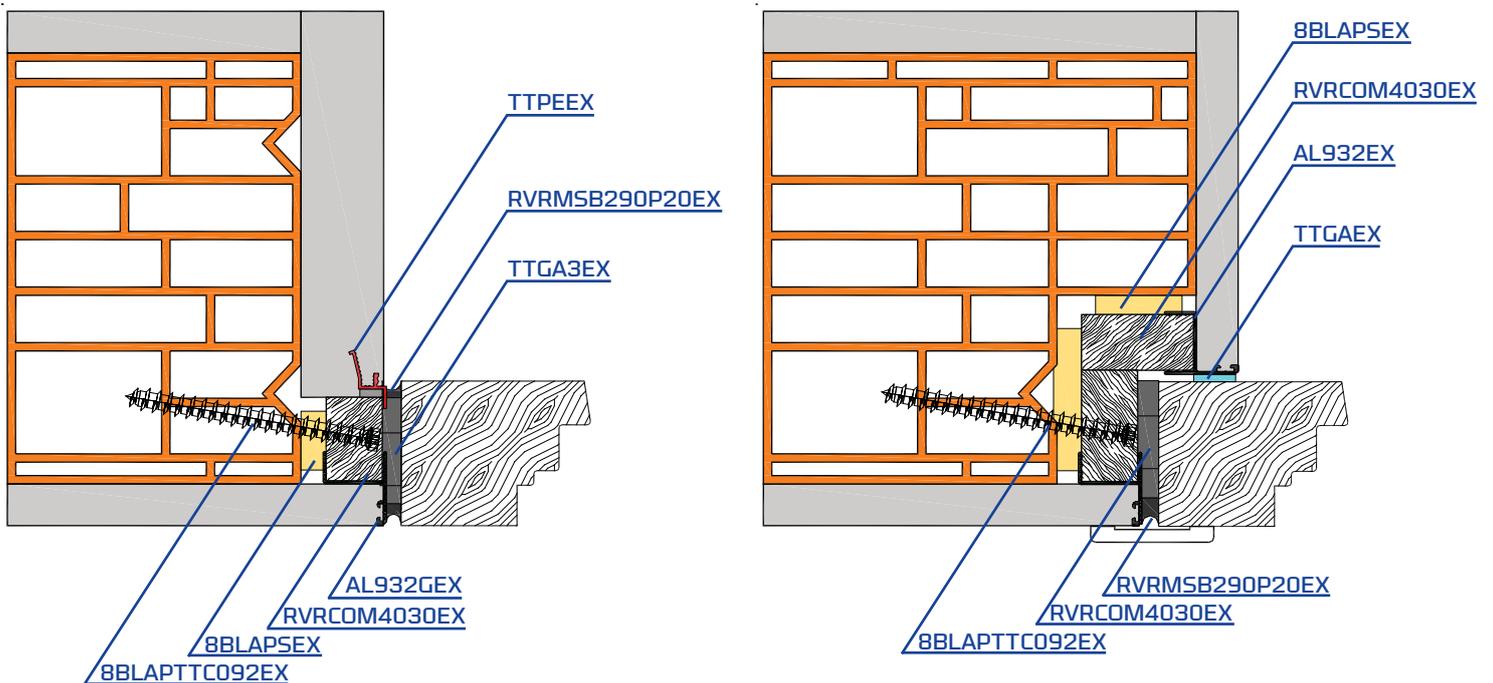

Detail of the installation of the window on - **Roverframe™**

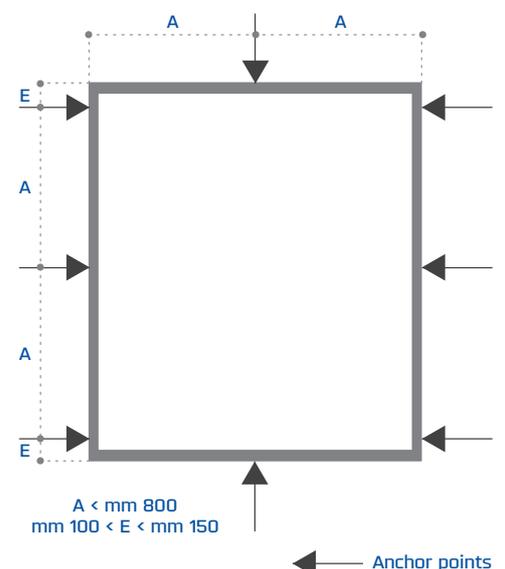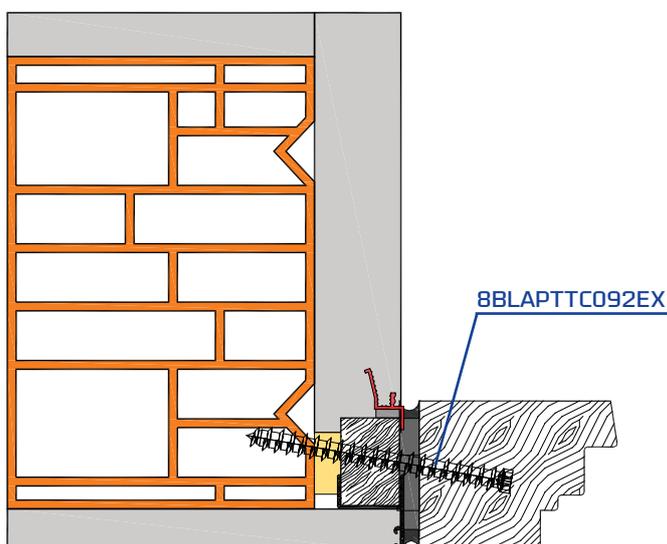



Roverplastik Spa
Zona Industriale 10
38060 Volano (TN)
Tel. 0464.020101
fax 0464.020180
info@roverplastik.it
www.roverplastik.it

AZIENDA CON SISTEMA DI GESTIONE
PER LA QUALITÀ CERTIFICATO DA DNV
= UNI EN ISO 9001:2008 =

